

Transduction

TR-LCD2010-RM
TR-LCD2010-PM

20.1" Rack Mount LCD Monitor
20.1" Panel Mount LCD Monitor

TR-LCD2010: SVGA, DVI-D, NTSC, PAL, SECAM

Features

- Viewable area 20.1"
- Brightness 300 cd/m²
- Contrast ratio 800:1
- Viewing angle V/H 178 °/178°
- Response time 16ms
- Pixel pitch 0.255mm
- Maximum Resolution 1600 x 1200
- Input power 100-240V AC or 18V DC, optional 24V , 48V, 125V and 250VDC
- Warranty 3 years



Reliable LG 20.1" TFT LCD module in industrial rack mount or panel mount enclosure. NEMA 4 epoxy coated finish over steel. Optional resistive touch screen.


OSD (On-Screen Display) Controls: Allow you to quickly and easily adjust elements of your screen image with simple to use on-screen menus: English, French, Italian, German and Spanish.

Full Scan Capability: Allows you to use the entire screen area.

Plug and Play: The Microsoft solution with the Windows 95/98/ME/2000/XP operating systems facilitates setup and installation by allowing the monitor to send its capabilities (such as screen size and resolutions supported) directly to your computer, automatically optimizing display performance.

ErgoDesign Features: Enhance human ergonomics to improve the working environment, protect the health of the user and save money.

Power Saving Mode: The monitor can be set to shift to a lower power consumption level when not in use. This will save useful life of backlight lamps.

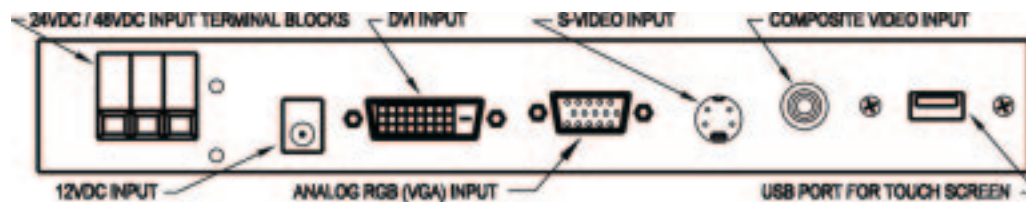

Transduction

TR-LCD2010-RM
TR-LCD2010-PM

20.1" Rack Mount LCD Monitor
20.1" Panel Mount LCD Monitor

TR-LCD2010: SVGA,DVI-D,NTSC,PAL,SECAM

SPECIFICATIONS:

- **Reliable LG LCD Module:**

Diagonal: 20.1"

Viewable Image Size: 19.0"

Native Resolution (Pixel Count): 1600 x 1200

Active matrix, thin film transistor (TFT) liquid crystal display (0.255 mm dot pitch, 300cd/m² white luminance, 800:1 contrast ratio)

- **Input Signal:**

SVGA Analog RGB

DVI - D

Composite Video & S - Video

- **Connectors:** SVGA high density DB15

- **Display Colors:** Analog input 8-bit 16,777,266

- **Maximum Viewing Angles:**

Left/Right and Up/Down - 178°

- **Synchronization Range:**

Horizontal: 15 KHz to 80 KHz

Vertical: 50 Hz to 77Hz

- **Resolution:**

Analog RGB : VGA/SVGA/XGA/WXGA/SXGA/UXGA

1600 x 1200 @ 75Hz Max

DVI - D : VGA/SVGA/XGA/WXGA/SXGA

1600 x 1200 @ 60Hz Max

CVBS & S - VIDEO : NTSC/PAL/SECAM

- **Active Display Area:**

Horizontal: 376.32 mm

Vertical: 301.056 mm

- **Power Supply:** 100 - 240 V ~ 50/60 Hz

70W external 18V DC adapter

- **Dimensions (W x D x H) / Weight :**

Rack mount: 18.96" x 3.00" x 14.00" (8U) / 14.3 lb
48.16cm x 7.62cm x 35.56cm / 6.5 kg

Panel mount: 19.25" x 3.00" x 15.25" / 14 lb

48.90cm x 7.62cm x 38.74cm / 6.35kg

- **Environmental Considerations:**

Operating Temperature: 0°C to 50 °C

Humidity: 20% to 80% , non-condensing

Altitude: 0 to 10,000 ft

Shock: 25G

Vibration: 5G

Storage Temperature: -20°C to 60 °C

Humidity: 5% to 90%, non-condensing

Altitude: 0 to 30,000 ft

- **Regulatory Approvals:**

UL CSA TUV CE

- **Warranty:** 3 years

- **Ordering Information:**

TR-LCD2010-RM Rack Mount version \$1600

TR-LCD2010-PM Panel Mount version \$1600

OEM discounts up to 30%



Options:

- Touch (Resistive USB) \$300
- 18V DC Input power N/C
- 24V DC Input power \$350
- 48V DC Input power \$350
- 125V DC Input power \$350
- 250V DC Input power \$350